

Mini-Plus Ceiling System

2.5, 3, 4, and 5 ton

R-410a



DCI
DATA AIRE INC.

ISO 9001 Certified

Table of Contents

DATA AIRE'S *Mini-Plus Ceiling System*™ is designed for environments where floor space is limited. Engineered for ducted above ceiling applications, the *Mini-Plus* is available in a wide range of system configurations and types; air cooled, water/glycol cooled, and chilled water. Split or packaged. *Mini-Plus Ceiling Systems* function with complete independence from other building air conditioning and ventilation systems.

High Performance, Low Cost

The *Mini-Plus Ceiling System* is engineered and built by Data Aire, the pioneer in precision cooling equipment. The *Mini-Plus* offers unparalleled quality at competitive prices. Every *Mini-Plus* system comes with Data Aire's commitment to excellence which began with its first precision cooling machine and has been tested and proven for more than thirty years.

Data Aire Delivers

Mini-Plus Ceiling Systems are not standard units shipped from stock. Each unit is built to specific needs and requirements. The standard ship cycle is ten working days from date of order. Optional premium orders can be expedited in one week. Call your local Data Aire sales representative for details.

• Design Features.....	4 - 8
• Options	9 - 10
• Standard Unit Features.....	11
• Model Number Identification.....	12
• Shipping Weights.....	13
• Performance Data	
Air Cooled	14 - 17
Water Cooled.....	18 - 21
Chilled Water	22 - 25
• Electrical Data Index	26
• Unit Drawings.....	57

DESIGN FEATURES

CONTROL SYSTEM

Standard units are shipped with Data Aire's wall mounted microprocessor *Mini dap4*.

ELECTRICAL

All electrical components including capacitors, relays, and control transformers are pre-wired. Each unit is provided with a microswitch to prevent condensate pan overflow. The microswitch will disable the unit prior to pan overflow should the drain line become plugged with debris.

ELECTRIC REHEAT

6 kW reheat is standard on 2.5 through 4 ton *Mini-Plus* units (5 ton *Mini-Plus* units have 6 kW reheat on single phase and 12 kW reheat on three phase). Electric reheat is accomplished with low watt, low density finned tube fabricated of stainless steel core sheath with plated fins to withstand moist conditions. Reheat is installed on the air discharge side of the cooling coil and provides ample capacity to maintain room dry bulb conditions during dehumidification. Low-watt density coils eliminate ionization associated with open air electric resistance heating.

CABINET

Mini-Plus indoor sections are constructed with tubular steel frames for strength and service access. Removable galvanized steel panels are lined with 1/2 inch thick closed cell insulation for quiet and efficient operation.

An integral filter section with 2" filters is standard.

AIR COOLED - PACKAGED SYSTEM

Evaporator Section

The evaporator section is a draw-through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours.

The evaporator coil is constructed of copper tubes and aluminum fins. The single stage refrigeration circuit includes an expansion valve with external equalization. A stainless steel drain pan is standard.

Condensing Section

The attached condensing unit contains a scroll compressor with crankcase heater, filter drier, sight glass, and condenser coil. The condenser coil is constructed with copper tubes and aluminum fins. The condenser blower is double inlet, double width with belt drive and variable pitch sheave.

Field supplied return and supply air ductwork is required for all *Mini-Plus* evaporator and condensing sections.

(See drawing - 535-900-001)

AIR COOLED - SPLIT SYSTEM with INDOOR CONDENSING UNIT

Evaporator Section

The evaporator section is a draw-through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours.

The evaporator coil is constructed of copper tubes and aluminum fins. The expansion valve with external equalization is contained in the evaporator section. A stainless steel drain pan is standard.

Condensing Section

The condensing unit contains a scroll compressor with crankcase heater, filter drier, sight glass, and condenser coil. The condenser coil is constructed with copper tubes and aluminum fins. The condenser blower is double inlet, double width with belt drive and variable pitch sheave.

Field supplied return and supply air duct work is required for all *Mini-Plus* evaporator and condensing sections.

Field piping and wiring is required between the indoor evaporator and condensing unit sections.

(See drawing 535-900-002)

DESIGN FEATURES

AIR COOLED - SPLIT SYSTEM with INDOOR CONDENSER

Evaporator/Compressor Section

The evaporator section is a draw through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours. The evaporator coil is constructed of copper tubes and aluminum fins. The expansion valve with external equalization is contained in the evaporator section. A stainless steel drain pan is standard.

The condensing section is contained in a "side car" and attached to the evaporator section. The condensing section includes a scroll compressor with crankcase heater, filter drier and sight glass.

Condenser Section

The condenser section includes a condenser coil and condenser blower. The condenser coil is constructed of copper tubes and aluminum fins. The blower is double inlet, double width with belt drive and variable pitch sheave.

Field supplied return and supply air duct work is required for all *Mini-Plus* evaporator and condenser sections.

Field piping and wiring is required between the indoor evaporator/compressor and the condenser section.

Single power source is provided at the evaporator section, for both sections, unless ordered with optional separate power sources.

(See drawing - 535-900-008)

AIR COOLED - SPLIT SYSTEM with OUTDOOR CONDENSING UNIT

Evaporator Section

The evaporator section is a draw-through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours.

The evaporator coil is constructed of copper tubes and aluminum fins. The single stage refrigeration circuit includes an expansion valve with external equalization. A stainless steel drain pan is standard.

Field supplied return and supply air ductwork is required for all *Mini-Plus* evaporator section.

AIR COOLED - SPLIT SYSTEM with OUTDOOR CONDENSING UNIT, *continued*

Outdoor Condensing Section

The condensing unit contains a scroll compressor with crankcase heater, filter drier, sight glass, and condenser coil. The condenser coil is constructed with copper tubes and aluminum fins. The galvanized steel housing and fan guard are powder coated for longer life. The energy efficient condenser fan is thermally protected. Air discharge is vertical. The condenser fan is variable speed for head pressure control to -20° F ambient conditions.

Field piping and wiring is required between the indoor evaporator section and the outdoor condensing unit.

(See drawing - 535-900-005)

AIR COOLED - SPLIT SYSTEM with OUTDOOR CONDENSER

Evaporator/Compressor Section

The evaporator section is a draw through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours. The evaporator coil is constructed of copper tubes and aluminum fins. The expansion valve with external equalization is contained in the evaporator section. A stainless steel drain pan is standard. The compressor section is contained in a "side car" and attached to the evaporator section and includes a scroll compressor with crankcase heater, filter drier and sight glass.

Field supplied return and supply air duct work is required for all *Mini-Plus* evaporator section.

Outdoor Condenser Section

The outdoor condenser includes a condenser coil, integral factory wired panel and condenser fan motor. The condenser coil is constructed of copper tubes and aluminum fins. The thermally protected fan motor is variable speed for head pressure control to -20° F ambient conditions. The galvanized steel housing is powder coated for longer life.

Field piping and wiring is required between the indoor evaporator/compressor and the condenser sections.

(See drawing - 535-900-006)

DESIGN FEATURES

WATER COOLED - PACKAGED SYSTEM

Evaporator Section

The evaporator section is a draw-through type with double width, double inlet blower with belt drive and variable pitch sheave. The self-aligning ball bearings are rated for a minimum life of 100,000 hours.

The evaporator coil is constructed of copper tubes and aluminum fins. The single stage refrigeration circuit includes an expansion valve with external equalization. A stainless steel drain pan is standard.

Field supplied return and supply air duct work is required for all *Mini-Plus* evaporator sections.

Compressor Section

The attached compressor section includes a scroll compressor with crankcase heater, filter drier, sight glass, coaxial condenser and head pressure water regulating valve. Maximum water pressure is 150 psi.

A dry cooler (fluid cooler) or water cooling source is required on water cooled systems.

(See drawing - 535-900-003)

CHILLED WATER SYSTEMS

Blower Section/Coil Section

The blower section contains a double width, double inlet blower with belt drive and a variable pitch sheave and blower motor. The self-aligning ball bearings are rated for a minimum life of 100,000 hours.

The chilled water coil and chilled water valve are housed in the blower section as well. The chilled water coil is constructed of copper tube and aluminum fins. Utilizing chilled water from an existing chilled water loop, water flow is controlled by a 2-way valve for accurate and economical temperature control and dehumidification. The drain pan is constructed from stainless steel.

Field supplied return and supply air duct work is required for all *Mini-Plus* blower sections.

(See drawing - 535-900-007)

WATER COOLED - SPLIT SYSTEMS

For applications with space restrictions water cooled systems may be ordered as split systems. The evaporator section and compressor sections (see Water Cooled - Packaged Systems) are shipped separately.

Field piping and wiring is required between the evaporator and compressor sections. Field supplied return and supply air duct work is required for all *Mini-Plus* evaporator sections.

A dry cooler (fluid cooler) or water cooling source is required on water cooled systems.

Single power source is provided at the evaporator section, for both sections, unless ordered with optional separate power sources.

(See drawing - 535-900-004)

SYSTEM CONTROL

Unit control is maintained with the microprocessor based *Mini dapTM4*. The *Mini dap4* is an advanced controller with 50 MHz, 32 bit microprocessor and is comprised of three components, a wall mounted display module, a control module mounted inside the unit and a remote temperature and humidity sensor. The *Mini dap4* monitors the controlled environment's temperature, humidity, air flow, and cleanliness, but also provides alarm history and an automatic self-test of the microprocessor on system start-up. Multiple messages are displayed by automatically scrolling from each message to the next. All messages are presented in a clear vernacular format on the liquid crystal display (LCD). Multiple alarms are displayed sequentially in order of occurrence.

OPERATION - Holding down the "ESC" button for a minimum of five seconds activates the *Mini dap4*, push buttons allow menu selection for programming, operational information, diagnostics, and historical data. The two-level password feature prevents unauthorized access. Menu programmed information for basic system operation and alarm parameters is nonvolatile.

PROGRAMMABLE FUNCTIONS :

Temperature Setpoint	Temperature Deadband
System Start Delay	Low Temperature Alarm Limit
Humidity Deadband	Humidity Setpoint
High Humidity Alarm Limit	Low Humidity Alarm Limit
Define Password	Reset Equipment Runtimes
Audio Alarm Mode	Compressor Short Cycle Alarm
Humidity Anticipation	Compressors(s)
Calibrate Temperature Sensor	Temperature Scale
High Temperature Alarm Limit	Water Valve Voltage Range*
Firestat Temperature Alarm Limit	Manual Diagnosis
No water flow alarm action*	Remote Alarm contacts
Calibrate Discharge Air Sensor*	Person to contact on Alarm
Compressor Lead/Lag Sequence*	Dehumidification Mode
Power Problem or Restart Mode	Scheduled Normal Maintenance
Reheat mode	Calibrate Humidity
Humidifier	Compressor Assists to Energy Saver*
Network Protocol	Low Discharge Temperature Alarm Limit*
Calibrate Chilled Water Temperature Sensor*	

DISPLAYED CONDITIONS, DATA, and FUNCTIONS:

Temperature setpoints	Humidity setpoint
Current temperature	Current humidity
Cooling 1, 2 (as applicable)	Reheat
Humidification	Dehumidification

ALARMS - Alarm conditions are displayed and monitored on the microprocessor LCD along with an audible alarm. The alarm silence switch will quiet the audible alarm but the display will continue to indicate the alarm condition until it is corrected. The following alarms are displayed:

High temperature warning	High humidity warning
Low temperature warning	Low humidity warning
High pressure compressor	High condensate water level
Firestat tripped	No air flow
Compressor short cycle	Low voltage warning
Temperature sensor error	Power failure restart
Humidity sensor error	Local alarms
Maintenance required	Person to contact on alarm


* - Some of the programmable elections, displays or alarms may require additional components or sensors.

SYSTEM CONTROL - continued

HISTORICAL DATA:

- | | |
|---|---------------------------------|
| High/low temperature last 24 hours | High/low humidity last 24 hours |
| Blower, compressor 1, compressor 2*, reheat, dehumidification, Energy Saver*, Equipment runtimes for: | |
| Humidifier, and chilled water * | Low temperature last 24 hours |
| Alarm history (last 100 alarms) | High humidity last 24 hours |


Control Module

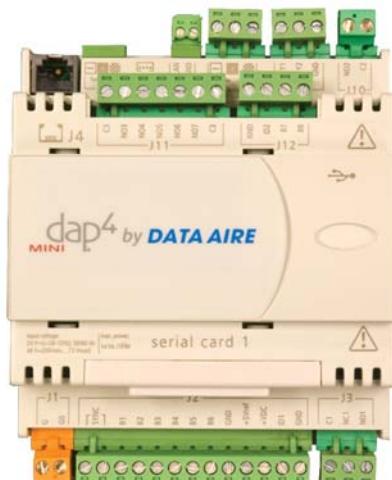

Temperature and Humidity Sensor



Display Module

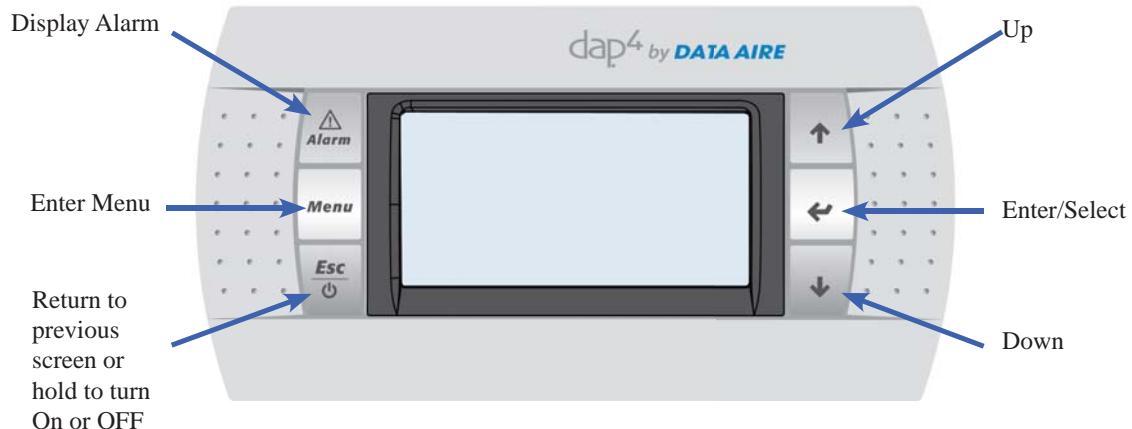

Button Functions

	Allows viewing of active alarms Silences audible alarms Resets active alarms		Allows scrolling to next screen Allows values changes (increase)
	Allows entry to Main Menu		Allows entry to Menus Advances cursor
	Return to previous screen Hold five seconds to turn ON or OFF		Returns to previous screen Allows value changes (decrease)

OPTIONS

ENERGY SAVER COIL - Water/glycol units may be ordered with *Energy Saver* coil to provide total required capacity. Whenever the incoming water/glycol temperature is below 45° F/7.2° C, *Energy Saver* cooling is available and mechanical cooling stops. The *Energy Saver* will operate as long as there is a call for cooling. If the temperature goes beyond setpoint plus 2 degrees, the *Energy Saver* valve will close and mechanical (DX) cooling will begin.

Units with *Energy Saver* are provided with next size motor and 3-way, 2-position valve. Common piping for coil and condenser.

NOTE: The cabinet height increases to 28.5".

AUXILIARY CHILLED WATER COIL - Air cooled or water/glycol units. When an existing chilled water loop is available, units can be fitted with an auxiliary chilled water coil. Units will operate using chilled water for cooling. Upon a loss of water flow or an increase in room temperature the system will bring on compressor (DX) cooling. Separate piping is provided for the chilled water coil.

Units with auxiliary chilled water coil are provided with next size motor and 3-way, 2 position valve. **NOTE:** The cabinet height increases to 28.5".

STEAM GENERATOR HUMIDIFIER - An electric steam generator humidifier with disposable cylinder and self-regulating auto flush is available. A five pound per hour humidifier may be added on all units (2.5 - 5 tons). A 10 pound per hour humidifier is also available on the 4 and 5 ton size units.

The 10 pound per hour humidifier can also be ordered with modulating control. Modulation feature allows the humidifier to match its output to the signal from the humidity control.

HOT WATER REHEAT - Where hot water is available, a water coil for reheat may be ordered. The coil is designed for 150 psi maximum water pressure and includes a 2-way valve. Units with hot water reheat do not include electric reheat.

HOT GAS REHEAT - The unit's hot gas discharge may be used for reheat and maximum system efficiency. Electric reheat is eliminated.

NOTE: Hot gas reheat option is not available with all configurations (consult factory on unit availability) or Energy Saver option. The next size motor selection is recommended.

DISCONNECT SWITCH - A unit mounted disconnect switch with 1/4 turn latch may be added. The switch must be in the "OFF" position to remove panel and access electrical compartment.

SEPARATE POWER SOURCE - Indoor split systems may be ordered with separate power feeds. A power connection is provided for both the evaporator section and/or condenser/condensing unit.

HOT GAS BYPASS - A hot gas bypass valve is available for applications that create low suction pressure conditions that could lead to coil freeze and/or compressor cycling. In facilities such conditions generally exist in instances where; 1) a unit's dehumidification mode needs to run for extended period of time; or 2) a room is designed for low entering air conditions; or 3) a unit is utilizing an oversized condenser at low outdoor ambient conditions.

When the system suction pressure is high enough it will maintain pressure on the leaving side of the hot gas bypass valve to keep the valve port closed. Should the suction pressure decrease below the desired setting, the pressure from the suction line forces the diaphragm, which off-sets the spring pressure, allowing the spring to push the valve open. The opening of this valve allows some hot gas to mix with the refrigerant in the suction line raising the evaporator pressure. This increases the suction pressure in the system back to the desired setting. The hot gas bypass can be manually adjusted within a certain range to fine tune the unit to a desired suction pressure in the field.

LOW AMBIENT CONTROL DAMPER - Indoor air cooled packaged or split systems may be ordered with a low ambient control damper. A damper section with head pressure operator enables unit to operate down to -30° F/34.4° C. Damper section and control ships loose for field installation.

UNIT MOUNTED RECEIVER - Unit mounted receiver in compressor section with pressure control and liquid line solenoid valve. Receiver allows unit to operate down to -30° F/34.4° C.

NOTE: Only available on units with remote outdoor condenser sections.

REMOTE RECEIVER - Insulated receiver with head pressure control valve. Liquid line solenoid valves are included.

NOTE: Consult with factory on runs exceeding 50 feet.

3-WAY WATER REGULATING VALVE

A 3-way pressure control valve replaces the standard 2-way valve.

OPTIONS

3-WAY CHILLED WATER - A 3-way chilled water valve replaces the standard 2-way valve.

CONDENSATE PUMP - Ships loose for field installation. Available in 115 or 230 volt. Power source is required. Pump has maximum of 8 feet head. Recommended installation is exterior to unit, preferably side mount. Option 210, side mounting kit, is available to facilitate this installation.

CEILING MOUNTED RETURN AIR GRILLE - A return air filter box with hinged grille and filter designed to fit in a dropped ceiling is available. Filters are easily removed and replaced through the hinged door. A duct connection is provided.
NOTE: Duct from filter box to unit is field supplied.

VERTICAL SUPPLY/RETURN AIR PLENUM - Available for 2.5 and 3 ton evaporator section only. Consists of a supply and return air plenum that fits in a 2 x 4 foot ceiling grid. Eliminates requirement for duct in ceiling space.

NOTE: Unit height is increased by 9.5 inches. The minimum ceiling requirement is 33.5 inches for units with vertical supply/return air grille option.

EXTENDED COMPRESSOR WARRANTY An additional four compressor warranty may be added to supplement standard eighteen month warranty.

CONTROLS

COOLING ONLY THERMOSTAT

When reheat is deleted from the unit you can use the cooling only thermostat in place of the *Mini-dap4* for temperature control.

COOLING ONLY PROGRAMMABLE THERMOSTAT

This option is similar to the cooling only thermostat but includes the ability for 5/2 day temperature programming. The easy to read full function LCD provides 12 or 24 hour clock display. (Only available when reheat is deleted from the *Mini-Plus Ceiling System*.)

EXPANDED dap4

Can be used in a DX system that requires more than two (2) optional alarms or a chilled water system that requires more than three (3) optional alarms or when the job requires both modulating Nortec humidifier and modulating chilled water valve.

SITE CONTROLS

DARA-4

This highly functional and economical site controller permits control of up to four units providing unit rotation, flexible backup capabilities, and communication with BMS systems that accept a dry set of alarm contact.

STANDARD FEATURES

Mini-Plus Ceiling Systems 2.5, 3, 4, and 5 ton

Mini dap4 microprocessor,
Belt drive motor with variable pitch sheave,
Stainless steel drain pan,
Electric reheat,
Unit mounted return air filter section,
Expansion valve with external equalizer,
Filter drier,
High pressure safety switch,
Low pressure safety switch,
Scroll compressor,
Crankcase heater,
Compressor anti-short cycle timer,
Micro-switch for condensate pan overflow,
2-way water regulating valve,
Plate-fin condenser,
2-way chilled water valve.


A micro-switch is mounted in the drain pan to prevent condensate overflow. The switch will close, shutting down unit.

All units are designed for ducted draw-through applications. An optional supply/return air plenum to fit in a 2 ft x 4 ft ceiling grid is available on 2.5 and 3 ton units.

Mini-Plus Ceiling Systems are available in the following:

- Air cooled packaged for above ceiling.
- Air cooled split - evaporator section and condensing unit for above ceiling.
- Air cooled split - evaporator/compressor section and condenser section for above ceiling.
- Air cooled split - evaporator/compressor section for above ceiling and remote outdoor condenser.
- Air cooled split - evaporator section for above ceiling and remote outdoor condensing unit.
- Water cooled packaged for above ceiling.
- Water cooled split - evaporator section and condensing unit for above ceiling.
- Chilled water.

Model Number Identification

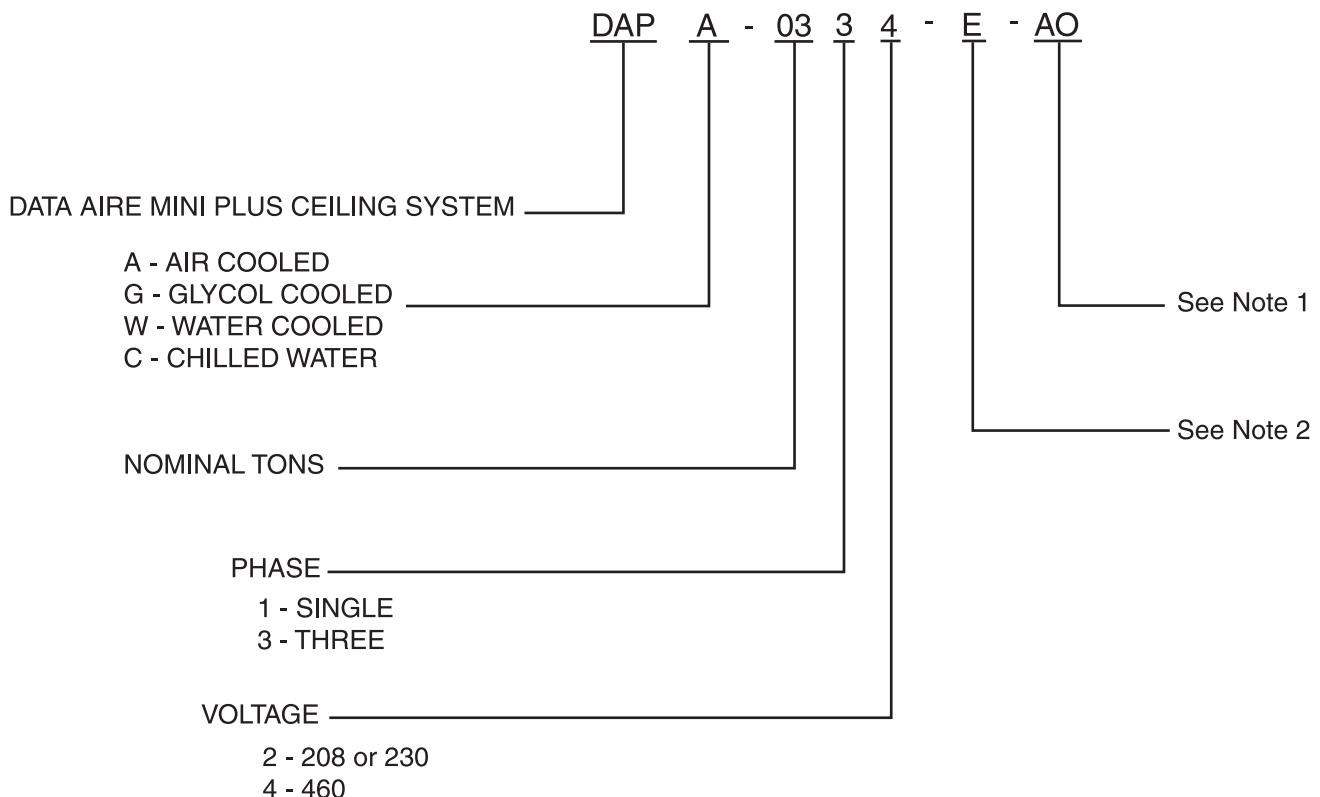

Note 1: The following letters will indicate the type of unit configuration

- P - Packaged system
- CI - Split system with indoor condenser (DAIC)
- CO - Split system with remote outdoor condenser (DARC)
- AI - Split system with indoor condensing unit (DAAC)
- AO - Split system with remote outdoor condensing unit (DRCU)
- WS - Split system with water cooled indoor condensing unit (DAWC)

Note 2: The following letters will designate optional cooling mode

- C - Auxiliary chilled water coil
- E - Energy saver coil

Shipping Weights

<u>Model</u>	Packaged Units	<u>Shipping Weight</u>
DAPA-2.5xx-P		700
DAPA-03xx-P		700
DAPA-04xx-P		910
DAPA-05xx-P		910
DAP*-2.5xx-P		640
DAP*-03xx-P		640
DAP*-04xx-P		800
DAP*-05xx-P		800
Chilled Water Units		
DAPC-2.5		415
DAPC-03		415
DAPC-04		540
DAPC-05		540

<u>Model</u>	<u>Evaporator Weight</u>	<u>Heat Exchanger</u>
Split System with Outdoor Condensing Section		
DAPA-2.5xx-AO	365	375
DAPA-03xx-AO	365	375
DAPA-04xx-AO	540	400
DAPA-05xx-AO	540	400
Split System with Outdoor Condenser		
DAPA-2.5xx-CO	590	230
DAPA-03xx-CO	590	230
DAPA-04xx-CO	750	335
DAPA-05xx-CO	750	335
Split System with Indoor Condensing Section		
DAPA-2.5xx-AI	360	340
DAPA-03xx-AI	360	340
DAPA-04xx-AI	465	435
DAPA-05xx-AI	465	435
Split System with Indoor Condenser		
DAPA-2.5xx-Cl	590	275
DAPA-03xx-Cl	590	275
DAPA-04xx-Cl	750	335
DAPA-05xx-Cl	750	335
Split System with Water Cooled Indoor Condensing Section		
DAP*-2.5xx-WS	340	300
DAP*-03xx-WS	340	300
DAP*-04xx-WS	440	360
DAP*-05xx-WS	440	360

* Insert "W" - for water cooled or "G" - for glycol cooled.

AIR COOLED: Performance data at STANDARD airflow

MODEL		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	31,200 24,600	36,700 29,100	53,000 40,500	62,200 48,800
75° DB/62.5° WB 50% RH	Total Sensible	29,400 24,400	34,600 28,900	48,700 39,800	59,400 48,800
75° DB/61° WB 45% RH	Total Sensible	28,600 26,000	33,700 30,800	47,300 42,300	57,800 52,000
72° DB/60° WB 50% RH	Total Sensible	28,200 23,700	33,200 28,000	46,600 38,600	56,600 47,200
72° DB/58.6° WB 45% RH	Total Sensible	27,200 25,300	32,100 30,000	45,100 41,300	55,200 50,700
BLOWER SECTION					
Airflow - CFM		1,000	1,200	1,600	2,000
Standard motor - HP		1/2	3/4	1	1-1/2
External static pressure E.S.P. - Inches of W.G.)		0.5	0.5	0.5	0.5
Number of fans/motors		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard evaporator motor)		0.8	0.8	0.8	0.7
Maximum E.S.P. (Next size evaporator motor)		1.2	1.2	1.1	1.0
Next size evaporator motor - HP		3/4	1	1-1/2	2
CONDENSER SECTION		<i>(Indoor Units Only)</i>			
Airflow -CFM		1,200	1,700	2,200	2,600
Standard motor - HP		3/4	1	1-1/2	2
External static pressure (E.S.P. - Inches of W.G.)		0.5	0.5	0.5	0.5
Maximum E.S.P. (Standard condenser motor)		0.8	0.8	0.8	0.7
Maximum E.S.P. (Next size condenser motor)		1.2	1.2	1.1	1.2
Next size condenser motor - HP		1	1-1/2	2	N/A
EVAPORATOR COIL					
Face area - sq. ft.		3	3	5	5
Rows of coil		4	4	4	4
Face velocity - FPM		333	400	320	400
CONDENSER COIL		<i>(Indoor units only)</i>			
Face area - sq. ft.		2.9	2.9	4.4	4.4
Rows of coil		6	6	6	6
Face velocity - FPM		414	586	505	597

AIR COOLED: Performance data at STANDARD airflow

MODEL	DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Refrigerant type	R-410a	R-410a	R-410a	R-410a
FILTER SECTION				
Quantity - Size (inches)	1-20x25x2	1-20x25x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV	8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)				
REHEAT SECTION				
Type	Electric	Electric	Electric	Electric
kW (Single phase)	6	6	6	6
Capacity - Btu/hr	20,500	20,500	20,500	20,500
kW (Three phase)	6	6	6	12
Capacity - Btu/hr	20,500	20,500	20,500	41,000
HUMIDIFIER SECTION				
(Optional Steam Generator)				
Capacity - lbs/hr	5	5	5	5
kW	1.7	1.7	1.7	1.7
Capacity - lbs/hr	N/A	N/A	10	10
kW	N/A	N/A	3.4	3.4
CONNECTION SIZES				
(All units)				
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
CONNECTION SIZES				
(Split systems with condensing unit)				
Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Suction line - O.D. Copper	3/4	3/4	3/4	3/4
CONNECTION SIZES				
(Split systems with condenser)				
Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Discharge line - O.D. Copper	1/2	1/2	1/2	1/2

NOTE: The actual required field line sizes will not necessarily be the same as the above connection sizes.

AIR COOLED: Performance data at OPTIONAL airflow

MODEL		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	32,900 28,300	39,000 33,500	53,300 45,500	66,600 56,400
75° DB/62.5° WB 50% RH	Total Sensible	30,200 27,600	35,800 32,800	50,500 45,100	61,200 55,200
75° DB/61° WB 45% RH	Total Sensible	29,400 29,300	34,700 34,500	48,800 48,200	59,600 59,100
72° DB/60° WB 50% RH	Total Sensible	29,200 26,800	34,200 31,600	48,200 43,600	58,700 53,400
72° DB/58.6° WB 45% RH	Total Sensible	28,500 28,300	33,000 32,800	46,500 46,300	57,000 56,700
BLOWER SECTION					
Airflow - CFM		1,250	1,500	2,000	2,500
Standard evaporator motor - HP		3/4	1	1-1/2	2
External static pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard evaporator motor)		0.6	0.5	1.0	1.0
Maximum E.S.P. (Next size evaporator motor)		1.0	1.0	1.2	N/A
Next size motor - HP		1	1 1/2	2	N/A
CONDENSER SECTION		<i>(Indoor units only)</i>			
Airflow - CFM		1,200	1,700	2,200	2,600
Standard condenser motor - HP		3/4	1	1-1/2	2
E.S.P. - inches of W.G.		0.5	0.5	0.5	0.5
Maximum E.S.P. (Standard condenser motor)		1.1	1.2	1.1	0.9
Maximum E.S.P. (Next size condenser motor)		1.5	1.2	1.5	N/A
Next size condenser motor - HP		1	1-1/2	2	N/A
EVAPORATOR COIL					
Face area - sq. ft.		3	3	5	5
Rows of coil		4	4	4	4
Face velocity - FPM		417	500	400	500
CONDENSER COIL		<i>(Indoor units only)</i>			
Face area - sq. ft.		2.9	2.9	4.4	4.4
Rows of coils		6	6	6	6
Face velocity - FPM		414	586	505	597

AIR COOLED: Performance data at OPTIONAL airflow

MODEL	DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Refrigerant type	R-410a	R-410a	R-410a	R-410a
FILTER SECTION				
Quantity -Size (inches)	1-20x25x2	1-20x25x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV	8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)				
REHEAT SECTION				
Type	Electric	Electric	Electric	Electric
kW (Single phase)	6	6	6	6
Capacity - Btu/hr	20,500	20,500	20,500	20,500
kW (Three phase)	6	6	6	12
Capacity - Btu/hr	20,500	20,500	20,500	41,000
HUMIDIFIER SECTION		<i>(Optional Steam Generator)</i>		
Capacity - lbs/hr	5	5	5	5
kW	1.7	1.7	1.7	1.7
Capacity - lbs/hr	N/A	N/A	10	10
kW	N/A	N/A	3.4	3.4
CONNECTION SIZES		<i>(All units)</i>		
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
CONNECTION SIZES		<i>(Split systems with condensing section)</i>		
Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Suction line - O.D. Copper	3/4	3/4	3/4	3/4
CONNECTION SIZES		<i>(Split systems with condenser section)</i>		
Liquid line - O.D. Copper	1/2	1/2	1/2	1/2
Discharge line - O.D. Copper	1/2	1/2	1/2	1/2

NOTE: The actual required field line sizes will not necessarily be the same as the above connection sizes.

WATER COOLED: Performance data at STANDARD airflow

MODEL		DAPW-2.5	DAPW-03	DAPW-04	DAPW-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	33,400 25,400	41,700 31,000	55,000 41,300	67,100 50,700
75° DB/62.5° WB 50% RH	Total Sensible	30,700 24,900	38,100 30,300	50,600 40,600	61,600 49,700
75° DB/61° WB 45% RH	Total Sensible	29,800 26,200	37,200 32,300	49,500 43,300	60,000 52,900
72° DB/60° WB 50% RH	Total Sensible	29,300 24,400	36,300 29,700	48,700 39,900	59,100 48,800
72° DB/58.6° WB 45% RH	Total Sensible	28,400 25,900	35,400 31,500	47,200 42,200	57,400 51,700
BLOWER SECTION					
Airflow - CFM		1,000	1,200	1,600	2,000
Standard evaporator motor - HP		1/2	3/4	1	1-1/2
External static pressure (E.S.P.) - inches of W.G.0.5		0.5	0.5	0.5	
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard evaporator motor)		0.8	0.8	0.8	0.7
Maximum E.S.P. (Next size evaporator motor)		1.2	1.2	1.1	1.0
Next size evaporator motor - HP		3/4	1	1-1/2	2
CONDENSER WATER					
		<i>Requirements</i>			
65° F entering fluid temperature PD - PSI	- GPM	2.6	3.9	5.2	6.5
		0.9	1.9	0.9	1.2
75° F entering fluid temperature PD - PSI	- GPM	4.2	6.2	8.3	10.4
		1.6	5.8	1.5	2.5
85° F entering fluid temperature PD - PSI	- GPM	6.0	9.0	12.0	15.0
		3.2	7.5	3.5	5.0
With fluid cooler - GPM PD - PSI		7.0 4.0	10.5 8.0	14.0 4.4	17.5 6.5
CONDENSER					
Type	Plate Fin	Plate Fin	Plate Fin	Plate Fin	Plate Fin
Water regulating valve	2-Way	2-Way	2-Way	2-Way	2-Way
Size - inches	3/4	3/4	1	1	1
Maximum working pressure - PSI	150	150	150	150	150

WATER COOLED: Performance data at STANDARD airflow

MODEL	DAPW-2.5	DAPW-03	DAPW-04	DAPW-05
EVAPORATOR COIL				
Face area - sq. ft.	3	3	5	5
Rows of coil	4	4	4	4
Face velocity - FPM	333	400	320	400
FILTER SECTION				
Quantity - Size (inches)	1-20x25x2	1-20x25x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV	8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)				
REHEAT SECTION				
Type	Electric	Electric	Electric	Electric
kW	6	6	6	6
Capacity - Btu/hr	20,500	20,500	20,500	20,500
kW	6	6	6	12
Capacity - Btu/hr	20,500	20,500	20,500	41,000
HUMIDIFIER SECTION		<i>(Optional Steam Generator)</i>		
Capacity - lbs/hr	5	5	5	5
kW	1.7	1.7	1.7	1.7
Capacity	N/A	N/A	10	10
kW	N/A	N/A	3.4	3.4
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Refrigerant type	R-410a	R-410a	R-410a	R-410a
CONNECTION SIZES				
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
Condenser water in - O.D. Copper	3/4	3/4	1 1/8	1 1/8
Condenser water out - O.D. Copper	3/4	3/4	1 1/8	1 1/8

WATER COOLED: Performance data at OPTIONAL airflow

MODEL		DAPW-2.5	DAPW-03	DAPW-04	DAPW-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	34,300 28,800	42,900 35,000	56,900 46,800	69,100 57,300
75° DB/62.5° WB 50% RH	Total Sensible	31,500 28,200	39,500 34,300	52,400 45,900	63,500 56,100
75° DB/61° WB 45% RH	Total Sensible	30,700 30,200	38,500 36,700	51,000 49,100	61,900 60,100
72° DB/60° WB 50% RH	Total Sensible	30,400 27,700	37,600 33,400	49,900 44,800	61,000 55,000
72° DB/58.6° WB 45% RH	Total Sensible	29,400 29,400	36,700 35,700	48,600 47,800	59,500 58,700
BLOWER SECTION					
Airflow - CFM		1,250	1,500	2,000	2,500
Standard evaporator motor - HP		3/4	1	1 1/2	2
External static pressure (E.S.P.) - inches of W.G.		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard evaporator motor)		0.6	0.5	1.0	1.0
Maximum E.S.P. (Next size evaporator motor)		1.0	1.0	1.2	N/A
Next size evaporator motor - HP		1	1 1/2	2	N/A
CONDENSER WATER		<i>Requirements</i>			
65° F Entering fluid temperature PD - PSI	GPM	2.6 0.9	3.9 1.9	5.2 0.9	6.5 1.2
75° F Entering fluid temperature PD - PSI	GPM	4.2 1.6	6.2 5.8	8.3 1.5	10.4 2.5
85° F Entering fluid temperature PD - PSI	GPM	6.0 3.2	9.0 7.5	12.0 3.5	15.0 5.0
With Fluid Cooler PD - PSI	GPM	7.0 4.0	10.5 8.0	14.0 4.4	17.5 6.5
CONDENSER					
Type	Plate Fin	Plate Fin	Plate Fin	Plate Fin	Plate Fin
Water regulating valve	2-Way	2-Way	2-Way	2-Way	2-Way
Size - inches	3/4	3/4	1	1	1
Maximum working pressure - PSI	150	150	150	150	150

WATER COOLED: Performance data at OPTIONAL airflow

MODEL	DAPW-2.5	DAPW-03	DAPW-04	DAPW-05
EVAPORATOR COIL				
Face area - sq. ft.	3	3	5	5
Rows of coil	4	4	4	4
Face velocity - FPM	417	500	400	500
FILTER SECTION				
Quantity - Size (inches)	1-20x25x2	1-20x25x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV	8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)				
REHEAT SECTION				
Type	Electric	Electric	Electric	Electric
kW (Single phase)	6	6	6	6
Capacity - Btu/hr	20,500	20,500	20,500	20,500
kW (Three phase)	6	6	6	12
Capacity - Btu/hr	20,500	20,500	20,500	41,000
HUMIDIFIER SECTION				
<i>(Optional Steam Generator)</i>				
Capacity - lbs/hr	5	5	5	5
kW	1.7	1.7	1.7	1.7
Capacity - lbs/hr	N/A	N/A	10	10
kW	N/A	N/A	3.4	3.4
COMPRESSOR				
Type	Scroll	Scroll	Scroll	Scroll
Refrigerant type	R-410a	R-410a	R-410a	R-410a
CONNECTION SIZES				
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
Condenser water in - O.D. Copper	3/4	3/4	1 1/8	1 1/8
Condenser water out - O.D. Copper	3/4	3/4	1 1/8	1 1/8

CHILLED WATER: Performance data at STANDARD airflow and 45° F entering chilled water

MODEL		DAPC-2.5	DAPC-03	DAPC-04	DAPC-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	36,700 26,700	44,200 32,000	65,400 45,500	77,500 54,800
75° DB/62.5° WB 50% RH	Total Sensible	28,800 24,100	34,600 28,800	50,800 40,600	60,300 49,100
75° DB/61° WB 45% RH	Total Sensible	27,100 25,000	32,400 29,800	47,100 42,000	56,100 50,800
72° DB/60° WB 50% RH	Total Sensible	24,800 22,200	29,700 26,600	43,300 37,400	51,500 45,200
72° DB/58.6° WB 45% RH	Total Sensible	23,600 23,100	28,100 27,500	40,500 38,600	48,500 46,700
CHILLED WATER					
<i>Requirements</i>					
Using 45° F EWT PD - PSI	GPM	8.0 2.1	11.0 3.6	14.0 5.9	17.0 8.4
BLOWER SECTION					
Airflow - CFM		1,000	1,200	1,600	2,000
Standard blower motor - HP		1/2	3/4	1	1-1/2
External static pressure (E.S.P.) - inches of W.G		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard blower motor)		0.8	0.8	0.8	0.7
Maximum E.S.P. (Next size blower motor)		1.2	1.2	1.1	1.0
Next size blower motor - HP		3/4	1	1-1/2	2
CHILLED WATER COIL					
Face area - sq. ft.	.	3	3	5	5
Rows of coil		4	4	4	4
Face velocity - FPM		333	400	320	400
CHILLED WATER VALVE					
Valve body		2-way	2-way	2-way	2-way
Valve size - inches		1	1	1	1
Maximum working pressure - PSI		150	150	150	150
FILTER SECTION					
Quantity - Size (inches)		1-20x25x2	1-20x25x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV		8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)					

CHILLED WATER: Performance data at STANDARD airflow and 45° F entering chilled water

MODEL	DAPC-2.5	DAPC-03	DAPC-04	DAPC-05
REHEAT SECTION				
Type		Electric	Electric	Electric
kW	(Single phase)	6	6	6
Capacity - Btu/hr		20,500	20,500	20,500
kW	(Three phase)	6	6	12
Capacity - Btu/hr		20,500	20,500	41,000
HUMIDIFIER SECTION				
<i>(Optional Steam Generator)</i>				
Capacity - lbs/hr		5	5	5
kW		1.7	1.7	1.7
Capacity - lbs/hr		N/A	N/A	10
kW		N/A	N/A	3.4
CONNECTION SIZES				
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
Chilled water supply - O.D. Copper	1 1/8	1 1/8	1 1/8	1 1/8
Chilled water return - O.D. Copper	1 1/8	1 1/8	1 1/8	1 1/8

CHILLED WATER: Performance data at OPTIONAL airflow and 45° F entering chilled water

MODEL		DAPC-2.5	DAPC-03	DAPC-04	DAPC-05
CAPACITY in Btu/hr - Gross					
80° DB/67° WB 50% RH	Total Sensible	40,500 31,000	49,000 37,200	73,100 53,000	86,100 63,700
75° DB/62.5° WB 50% RH	Total Sensible	32,200 28,100	38,700 33,600	57,400 47,700	67,800 57,500
75° DB/61° WB 45% RH	Total Sensible	30,700 29,300	36,700 35,000	53,800 49,600	63,900 59,700
72° DB/60° WB 50% RH	Total Sensible	28,000 26,100	33,500 31,100	49,300 44,100	58,400 53,100
72° DB/58.6° WB 45% RH	Total Sensible	27,000 26,900	32,300 32,100	46,800 45,700	55,800 54,900
CHILLED WATER		<i>Requirements</i>			
Using 45° F EWT PD in PSI	GPM	8.0 2.1	11.0 3.6	14.0 5.9	17.0 8.4
BLOWER SECTION					
Airflow - CFM		1,250	1,500	2,000	2,500
Standard blower motor - HP		3/4	1	1 1/2	2
External static pressure (E.S.P.) - inches of W.G		0.5	0.5	0.5	0.5
Number of motors/fans		1/1	1/1	1/1	1/1
Maximum E.S.P. (Standard blower motor)		0.6	0.5	1.0	1.0
Maximum E.S.P. (Next size blower motor)		1.0	1.0	1.2	N/A
Next size blower motor - HP		1	1 1/2	2	N/A
CHILLED WATER COIL					
Face area - sq. ft.		3	3	5	5
Rows of coil		4	4	4	4
Face velocity - FPM		417	500	400	500
CHILLED WATER VALVE					
Valve		2-way	2-way	2-way	2-way
Valve size - inches		1	1	1	1
Maximum working pressure - PSI		150	150	150	150
FILTER SECTION					
Quantity - Size (inches)		1-20x20x2	1-20x20x2	1-16x20x2 1-20x20x2	1-16x20x2 1-20x20x2
Efficiency - MERV		8	8	8	8
(Note: Efficiency based on ASHRAE Std. 52.2)					

CHILLED WATER: Performance data at OPTIONAL airflow and 45° F entering chilled water

MODEL	DAPC-2.5	DAPC-03	DAPC-04	DAPC-05
REHEAT SECTION				
Type	Electric	Electric	Electric	Electric
kW	6	6	6	6
Capacity - Btu/hr	20,500	20,500	20,500	20,500
kW	6	6	6	12
Capacity - Btu/hr	20,500	20,500	20,500	41,000
HUMIDIFIER SECTION <i>(Optional Steam Generator)</i>				
Capacity - lbs/hr	5	5	5	5
kW	1.7	1.7	1.7	1.7
Capacity - lbs/hr	N/A	N/A	10	10
kW	N/A	N/A	3.4	3.4
CONNECTION SIZES				
Humidifier supply - O.D. Copper	1/4	1/4	1/4	1/4
Condensate drain - FPT	3/4	3/4	3/4	3/4
Chilled water supply - O.D. Copper	1 1/8	1 1/8	1 1/8	1 1/8
Chilled water return - O.D. Copper	1 1/8	1 1/8	1 1/8	1 1/8

ELECTRICAL DATA

AIR COOLED - Single Power Source Units (Indoor Packaged or Split Systems)

<i>Applicable to the following models:</i>	DAPA-2.5xx-P thru DAPA-05xx-P	(see drawing 535-900-001)
	DAPA-2.5xx-AI thru DAPA-05xx-AI	(see drawing 535-900-002)
	DAPA-2.5xx-CI thru DAPA-05xx-CI	(see drawing 535-900-008)

Electrical Data Sheet	<u>Page</u>
Standard airflow.....	27
Standard airflow and next size motor.....	28
Optional airflow	29
Optional airflow and next size motor	30

AIR COOLED - Dual Power Source Units (Indoor Split Systems)

<i>Applicable to the following models:</i>	DAPA-2.5xx-CI thru DAPA-05xx-CI	(see drawing 535-900-008)
--	---------------------------------	---------------------------

Electrical Data Sheet	
Standard airflow - Indoor evaporator/condensing section and indoor condenser.....	31
Standard airflow and next size motor - Indoor evaporator/condensing section and indoor condenser.....	32
Optional airflow - Indoor evaporator/condensing section and indoor condenser	33
Optional airflow and next size motor - indoor evaporator/condensing section and indoor condenser	34

<i>Applicable to the following models:</i>	DAPA-2.5xx-AI thru DAPA-05xx-AI	(see drawing 535-900-002)
--	---------------------------------	---------------------------

Electrical Data Sheet	
Standard airflow - Indoor evaporator section and indoor condensing section.....	35
Standard airflow and next size motor - Indoor evaporator section and indoor condensing section.....	36
Optional airflow - Indoor evaporator section and indoor condensing section.....	37
Optional airflow and next size motor - Indoor evaporator section and indoor condensing section	38

AIR COOLED - Dual Power Source Units (Indoor/Outdoor Sections)

<i>Applicable to the following models:</i>	DAPA-2.5xx-CO thru DAPA-05xx-CO	(see drawing 535-900-006)
--	---------------------------------	---------------------------

Electrical Data Sheet	
Standard airflow - Indoor evaporator section and remote outdoor condenser	39
Standard airflow and next size motor - Indoor evaporator section and remote outdoor condenser	40
Optional airflow - Indoor evaporator section and remote outdoor condenser	41
Optional airflow and next size motor - Indoor evaporator section and remote outdoor condenser	42

<i>Applicable to the following models:</i>	DAPA-2.5xx-AO thru DAPA-05xx-AO	(see drawing 535-900-005)
--	---------------------------------	---------------------------

Electrical Data Sheet	
Standard airflow - Indoor evaporator section and outdoor condensing section.....	43
Standard airflow and next size motor - Indoor evaporator section and outdoor condensing section.....	44
Optional airflow - Indoor evaporator section and outdoor condensing section.....	45
Optional airflow and next size motor - Indoor evaporator section and outdoor condensing section	46

WATER COOLED - Single Power Source (Indoor Packaged or Split Systems)

<i>Applicable to the following models:</i>	DAPW-2.5xx-P thru DAPA-05xx-P	(see drawing 535-900-003)
	DAPW-2.5xx-WS thru DAPA-05xx-WS	(see drawing 535-900-004)

Electrical Data Sheet	
Standard airflow.....	47
Standard airflow and next size motor.....	48
Optional airflow	49
Optional airflow and next size motor	50

CHILLED WATER

<i>Applicable to the following models:</i>	DAPC-2.5xx thru DAPC-05xx	(see drawing 535-900-007)
--	---------------------------	---------------------------

Electrical Data Sheet	
Standard airflow.....	51
Standard airflow and next size motor.....	52
Optional airflow	53
Optional airflow and next size motor	54

SUPPLEMENTAL DATA

Electrical Data Sheet

Split systems with indoor evaporator section and indoor condensing section using next size condenser motor.
(DAPA-2.5xx-AI thru DAPA-05xx-AI) (see drawing 535-900-002)

Split systems with indoor evaporator/condensing section and indoor condenser section using next size condenser motor.
(DAPA-2.5xx-CI thru DAPA-05xx-CI) (see drawing 535-900-008)

AIR COOLED: Electrical data at STANDARD airflow
Packaged or split indoor systems with single power source

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	50/61/70	55/67/70	67/80/90	76/90/110
208-230/3/60	FLA/MCA/MOP	31/37/40	34/40/45	39/47/50	62/75/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	67/80/90	76/90/110
208-230/3/60	FLA/MCA/MOP	N/A	N/A	39/47/50	62/75/80
460/3/60	FLA/MCA/MOP	N/A	N/A	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	30/35/45	35/41/50	47/55/70	55/64/90
208-230/3/60	FLA/MCA/MOP	22/27/30	25/30/35	31/36/40	37/44/50
460/3/60	FLA/MCA/MOP	11/13/15	12/14/15	16/18/20	18/22/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	55/65/80	63/75/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	39/47/50	44/53/60
460/3/60	FLA/MCA/MOP	N/A	N/A	19/23/25	22/26/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	50/61/70	55/67/70	67/80/90	76/90/110
208-230/3/60	FLA/MCA/MOP	31/37/40	34/40/45	39/47/50	61/74/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	22/25/35	27/31/45	39/44/60	47/54/80
208-230/3/60	FLA/MCA/MOP	14/16/25	17/19/25	23/26/35	28/32/45
460/3/60	FLA/MCA/MOP	7.1/8.2/15	8.0/10/15	12/14/20	15/17/20
<u>Standard evaporator fan motor</u>					
Horsepower		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Condenser fan motor</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* All selections are based on using standard horsepower condenser motor

AIR COOLED: Electrical data at STANDARD airflow
Packaged or split indoor systems with single power source with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	52/62/70	57/68/70	70/83/90	76/91/110
208-230/3/60	FLA/MCA/MOP	32/38/40	34/41/45	40/47/50	63/75/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	21/24/25	30/36/40
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	70/83/90	76/91/110
208-230/3/60	FLA/MCA/MOP	N/A	N/A	40/47/50	63/75/80
460/3/60	FLA/MCA/MOP	N/A	N/A	21/24/25	30/36/40
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	31/36/45	36/42/50	49/57/70	56/65/90
208-230/3/60	FLA/MCA/MOP	23/27/30	26/30/35	31/37/45	37/44/50
460/3/60	FLA/MCA/MOP	11/13/15	12/15/20	17/19/25	19/22/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	58/68/80	64/75/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	39/47/50	46/54/60
460/3/60	FLA/MCA/MOP	N/A	N/A	20/24/25	22/26/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	52/62/70	57/68/70	70/83/90	76/91/110
208-230/3/60	FLA/MCA/MOP	32/38/40	34/41/45	40/47/50	63/75/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	21/24/25	30/36/40
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	23/26/35	28/32/45	41/47/70	47/55/80
208-230/3/60	FLA/MCA/MOP	15/17/25	18/20/30	23/26/35	29/34/50
460/3/60	FLA/MCA/MOP	7.5/8.6/15	9.0/10/15	13/15/20	15/17/20
<u>Evaporator fan motor</u>		<i>NEXT SIZE MOTOR</i>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condenser fan motor</u>		<i>NEXT SIZE MOTOR</i>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>		<i>NEXT SIZE MOTOR</i>			
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* All selections are based on using standard horsepower condenser motor

AIR COOLED: Electrical data at OPTIONAL airflow
Packaged or split indoor systems with single power source

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	51/62/70	57/68/70	68/81/90	76/90/110
208-230/3/60	FLA/MCA/MOP	31/37/40	34/40/45	39/46/50	61/74/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	68/81/90	76/90/110
208-230/3/60	FLA/MCA/MOP	N/A	N/A	39/46/50	61/74/80
460/3/60	FLA/MCA/MOP	N/A	N/A	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	30/36/45	36/42/50	47/55/70	55/64/90
208-230/3/60	FLA/MCA/MOP	22/27/30	25/30/35	31/35/45	36/43/50
460/3/60	FLA/MCA/MOP	11/13/15	12/14/15	16/18/25	18/22/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	56/66/80	63/75/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	38/46/50	44/53/60
460/3/60	FLA/MCA/MOP	N/A	N/A	19/23/25	22/26/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	51/62/70	57/68/70	68/81/90	76/90/110
208-230/3/60	FLA/MCA/MOP	31/37/40	34/40/45	39/46/50	61/74/80
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	20/23/25	30/36/40
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	22/26/35	28/32/45	39/45/60	47/54/80
208-230/3/60	FLA/MCA/MOP	14/16/25	17/19/25	22/25/35	28/32/45
460/3/60	FLA/MCA/MOP	7.1/8.2/15	8.0/10/15	12/14/20	15/17/25
<u>Evaporator fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA Full Load Amps

MCA Minimum Circuit Amps (Wire Sizing Amps)

MOP Maximum Over-current Protection Device Amps

* All selections are based on using standard horsepower condenser motor

AIR COOLED: Electrical data at OPTIONAL airflow
Packaged or split indoor systems with single power source NEXT SIZE MOTOR*
WITH NEXT SIZE MOTOR

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	53/64/70	58/70/80	70/83/90	N/A
208-230/3/60	FLA/MCA/MOP	32/38/40	35/41/45	40/47/50	N/A
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	21/24/25	N/A
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	70/83/90	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	40/47/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	21/24/25	N/A
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/38/45	38/44/50	49/57/70	N/A
208-230/3/60	FLA/MCA/MOP	23/27/40	26/30/35	31/37/50	N/A
460/3/60	FLA/MCA/MOP	11/13/15	12/15/20	17/19/25	N/A
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	58/68/80	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	39/47/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	20/24/25	N/A
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	53/64/70	58/70/80	70/83/90	N/A
208-230/3/60	FLA/MCA/MOP	32/38/40	34/41/45	40/47/50	N/A
460/3/60	FLA/MCA/MOP	15/18/20	16/19/20	21/24/25	N/A
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	24/27/40	31/35/50	41/47/70	N/A
208-230/3/60	FLA/MCA/MOP	15/17/25	19/21/30	23/26/35	N/A
460/3/60	FLA/MCA/MOP	7.5/8.6/15	10/11/15	13/15/20	N/A
<u>Evaporator fan motor</u>		<i>NEXT SIZE MOTOR</i>			
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at STANDARD airflow
Split indoor systems with dual power source

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	25/31/40	29/36/45	39/47/60	46/55/80
208-230/3/60	FLA/MCA/MOP	19/24/25	21/26/30	25/31/40	30/37/50
460/3/60	FLA/MCA/MOP	8.8/10/15	10/12/15	13/16/20	15/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	46/56/70	54/65/80
208-230/3/60	FLA/MCA/MOP	N/A	N/A	33/41/50	38/47/60
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	17/20/30	21/25/40	31/36/60	38/45/70
208-230/3/60	FLA/MCA/MOP	11/13/15	13/16/25	17/20/30	22/26/40
460/3/60	FLA/MCA/MOP	5.6/6.7/15	6.6/7.9/15	9.0/11/15	12/14/20
<u>Evaporator fan motor data</u>					
Horsepower		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Condenser data</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/11.6/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/7.1/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps MCA - Minimum circuit amps (wire sizing amps)MOP - Maximum over-current protection device amps

AIR COOLED: Electrical data at STANDARD airflow
Split indoor systems with dual power source with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	66/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/68/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	61/74/90	66/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/43/50	55/68/70
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	27/32/40	31/37/50	41/49/70	46/55/80
208-230/3/60	FLA/MCA/MOP	20/24/30	22/27/30	26/32/40	30/37/50
460/3/60	FLA/MCA/MOP	10/12/15	11/13/15	14/17/20	15/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	54/65/80
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/42/50	38/47/60
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	66/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	55/68/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	22/26/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Evaporator fan motor data</u>		<u>NEXT SIZE</u>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condenser data</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/11.6/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/7.1/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

**AIR COOLED: Electrical data at OPTIONAL airflow
Split indoor systems with dual power source**

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	25/31/40	29/36/45	39/47/60	46/55/80
208-230/3/60	FLA/MCA/MOP	19/24/30	21/26/30	25/31/40	30/37/50
460/3/60	FLA/MCA/MOP	8.8/10.5/15	10/12/15	13/16/20	15/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	47/57/70	54/65/80
208-230/3/60	FLA/MCA/MOP	N/A	N/A	33/41/50	38/47/60
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	18/21/30	21/25/40	31/36/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	13/16/25	17/26/30	22/26/40
460/3/60	FLA/MCA/MOP	5.6/6.7/15	6.6/7.9/15	9.2/11/15	12/14/20
<u>Evaporator fan motor</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condenser data</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/7.1/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

AIR COOLED: Electrical data at OPTIONAL airflow
Split indoor systems with dual power source NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/60/60	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/45	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/44/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/22/25	N/A
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	28/31/40	33/39/50	41/49/70	N/A
208-230/3/60	FLA/MCA/MOP	19/24/30	23/28/35	28/33/40	N/A
460/3/60	FLA/MCA/MOP	10/12/15	12/14/15	14/17/20	N/A
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/43/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	N/A
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/40	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	20/24/35	25/29/40	33/39/50	N/A
208-230/3/60	FLA/MCA/MOP	13/15/20	15/18/25	20/23/35	N/A
460/3/60	FLA/MCA/MOP	6.3/7.4/15	7.9/9.2/15	10/12/15	N/A
<u>Evaporator fan motor</u> <i>NEXT SIZE MOTOR</i>					
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
<u>Condenser data</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/11.6/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/7.1/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Condenser fan motor</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at STANDARD airflow
Split indoor systems with dual power source

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	33/43/45	36/44/45	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	
18/22/25					
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	35/44/45	38/47/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	N/A	N/A	7.9/9.4/15	18/22/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	12/15/15	13/17/20	15/19/20	17/21/25
208-230/3/60	FLA/MCA/MOP	10/13/15	11/14/15	12/15/20	13/16/20
460/3/60	FLA/MCA/MOP	4.3/5.1/15	5.1/6.0/15	5.7/6.7/15	7.7/9.0/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	23/29/30	25/31/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	21/26/30
460/3/60	FLA/MCA/MOP	N/A	N/A	7.9/9.4/15	9.9/11.6/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	34/43/45	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	18/22/25
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	3.5/4.4/15	5.3/6.6/15	6.8/8.5/15	8.8/11/15
208-230/3/60	FLA/MCA/MOP	2.2/2.8/15	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15
460/3/60	FLA/MCA/MOP	1.1/1.4/15	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15
<u>Evaporator motor</u> <i>Standard</i>					
Horsepowers		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Condensing unit data</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Condenser fan motor data</u>					
Horsepowers		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
FLA - Full load amps		MCA - Minimum circuit amps (wire sizing amps)		MOP - Maximum over-current protection device amps	

AIR COOLED: Electrical data at STANDARD airflow
Split indoor systems with dual power source with NEXT SIZE MOTOR*

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.1/6.0/15	5.7/6.7/15	7.7/9.0/15	8.1/9.4/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	9.9/13/15	10/13/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/44/45	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/15
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Evaporator fan motor</u>		<u>NEXT SIZE MOTOR</u>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condensing unit data</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at OPTIONAL airflow
Split indoor systems with dual power source

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	
18/23/25					
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.1/6.0/15	5.7/6.7/15	7.7/9.0/15	8.1/9.4/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	9.9/13/15	10/13/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/44/45	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.0/8.5/15	8.8/11/15	9.3/12/15
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Evaporator fan motor data</u>					
		<i>Standard</i>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Condensing unit data</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
FLA - Full load amps		MCA - Minimum circuit amps (wire sizing amps)		MOP - Maximum over-current protection device amps	

AIR COOLED: Electrical data at OPTIONAL airflow
Split indoor systems with dual power source with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/47/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	21/27/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	10/13/15	11/13/15	N/A
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	23/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	11/13/15	N/A
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	15/19/20	17/21/25	17/22/25	N/A
208-230/3/60	FLA/MCA/MOP	12/15/20	13/16/20	14/18/20	N/A
460/3/60	FLA/MCA/MOP	5.7/6.7/15	6.7/8.4/15	6.7/8.4/15	N/A
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	26/32/35	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	22/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	N/A
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/48/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	23/28/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	11/13/15	11/13/15	N/A
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	6.8/8.5/15	9.3/12/20	9.3/12/15	N/A
208-230/3/60	FLA/MCA/MOP	3.6/4.5/15	6.0/7.5/15	6.0/7.5/15	N/A
460/3/60	FLA/MCA/MOP	1.8/2.3/15	3.0/3.8/15	3.0/3.8/15	N/A
<u>Evaporative fan motor data</u>					
		<i>NEXT SIZE MOTOR</i>			
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
<u>Condensing unit data</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Condenser fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at STANDARD airflow
Split systems with indoor evaporator and remote outdoor condenser

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	25/31/40	29/35/45	39/47/60	46/55/80
208-230/3/60	FLA/MCA/MOP	19/24/25	21/26/30	25/31/40	30/37/50
460/3/60	FLA/MCA/MOP	9.3/11/15	10/12/15	13/16/20	15/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	47/57/70	54/65/80
208-230/3/60	FLA/MCA/MOP	N/A	N/A	33/41/50	38/47/60
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	17/20/30	21/25/40	31/36/60	38/45/70
208-230/3/60	FLA/MCA/MOP	11/13/20	13/16/25	17/20/30	22/26/40
460/3/60	FLA/MCA/MOP	5.6/6.7/15	6.6/7.9/15	9.2/11/15	12/14/20
<u>Evaporator fan motor data</u>		<i>Standard</i>			
Horsepowers		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Outdoor condenser data</u>					
		DARC-03	DARC-03	DARC-05	DARC-05
208-230/1/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
208-230/3/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
460/3/60	FLA/MCA/MOP	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15
<u>Condenser fan motor data</u>					
Horsepowers		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

AIR COOLED: Electrical data at STANDARD airflow

Split systems with indoor evaporator and remote outdoor condenser with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	27/32/40	31/37/50	41/49/70	46/56/80
208-230/3/60	FLA/MCA/MOP	20/24/25	22/27/30	26/32/40	31/38/40
460/3/60	FLA/MCA/MOP	10/12/15	11/13/15	14/17/20	16/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	54/66/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/42/50	40/48/60
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	66/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Evaporative fan motor</u>		<i>NEXT SIZE MOTOR</i>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Outdoor condenser data</u>					
		DARC-03	DARC-03	DARC-05	DARC-05
208-230/1/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
208-230/3/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
460/3/60	FLA/MCA/MOP	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15
<u>Condenser fan data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at OPTIONAL airflow
Split systems with indoor evaporator and remote outdoor condenser

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	50/61/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/36/40	30/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/17/20	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	27/33/35
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	28/34/45	29/36/45	41/49/70	46/56/80
208-230/3/60	FLA/MCA/MOP	21/25/30	21/26/30	26/32/35	31/38/50
460/3/60	FLA/MCA/MOP	10/12/15	10/12/15	14/17/20	16/19/25
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	54/66/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/42/50	40/48/60
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	19/23/30
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/79	50/61/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/36/40	30/37/40	35/43/50	40/48/60
460/3/60	FLA/MCA/MOP	14/17/20	14/17/20	18/21/25	20/24/30
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	20/24/35	21/25/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	13/15/20	13/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.3/7.4/15	6.6/7.9/15	10/12/15	12/14/20
<u>Evaporator fan motor Standard</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Outdoor condenser data</u>					
		DARC-03	DARC-03	DARC-05	DARC-05
208-230/1/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
208-230/3/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
460/3/60	FLA/MCA/MOP	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

AIR COOLED: Electrical data at OPTIONAL airflow
Split systems with indoor evaporator and remote outdoor condenser with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/45	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/44/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/22/25	N/A
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	28/34/45	33/39/50	41/49/70	N/A
208-230/3/60	FLA/MCA/MOP	21/25/30	23/28/35	28/33/40	N/A
460/3/60	FLA/MCA/MOP	10/12/15	12/14/15	14/17/20	N/A
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/43/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	N/A
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/40	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	20/24/35	25/29/40	33/39/60	N/A
208-230/3/60	FLA/MCA/MOP	13/15/20	15/18/25	20/23/35	N/A
460/3/60	FLA/MCA/MOP	6.3/7.4/15	7.9/9.2/15	10/12/15	N/A
<u>Evaporator fan motor</u>					
		<i>NEXT SIZE MOTOR</i>			
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Outdoor condenser data</u>					
		DARC-03	DARC-03	DARC-05	DARC-05
208-230/1/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
208-230/3/60	FLA/MCA/MOP	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15	4.2/5.3/15
460/3/60	FLA/MCA/MOP	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15	2.1/2.6/15
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at STANDARD airflow
Split systems with indoor evaporator and remote outdoor condensing section

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	34/43/45	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	18/22/25
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	N/A	N/A	9.3/12/15	18/22/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	12/15/20	13/17/20	15/19/20	17/21/25
208-230/3/60	FLA/MCA/MOP	10/13/15	11/14/15	12/15/20	13/16/20
460/3/60	FLA/MCA/MOP	4.8/6.0/15	5.2/6.5/15	5.5/6.9/20	6.5/8.1/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	23/29/30	25/31/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	21/26/30
460/3/60	FLA/MCA/MOP	N/A	N/A	9.2/11/15	10/13/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	34/43/45	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	21/27/30
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	10/13/15
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	3.5/4.4/15	5.3/6.6/15	6.8/8.5/15	8.8/11/15
208-230/3/60	FLA/MCA/MOP	2.2/2.8/15	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15
460/3/60	FLA/MCA/MOP	1.1/1.4/15	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15
<u>Evaporator fan motor</u>					
		<i>Standard</i>			
Horsepower		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Outdoor condensing unit</u>					
Tons in nominal tons	DRCU-xxxx	2.5	3	4	5
208-230/1/60	FLA/MCA/MOP	18/21/30	20/24/40	28/34/50	33/40/60
208-230/3/60	FLA/MCA/MOP	13/15/20	15/17/25	18/21/30	22/26/40
460/3/60	FLA/MCA/MOP	6.6/7.7/15	7.2/8.5/15	10/11/15	11/13/20
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1
FLA - Full load amps	MCA - Minimum circuit amps (wire sizing amps)				MOP - Maximum over-current protection device amps

AIR COOLED: Electrical data at STANDARD airflow

Split systems with indoor evaporator and remote outdoor condensing section with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.2/6.5/15	5.5/6.9/15	6.5/8.1/20	6.7/8.4/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	25/31/35	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/26/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	10/13/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	23/28/30
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	11/13/15
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/15
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Evaporator fan motor data</u>		<i>NEXT SIZE MOTOR</i>			
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Outdoor condensing data</u>					
Tons in Nominal	Tons DRCU-xxxx	2.5	3	4	5
208-230/1/60	FLA/MCA/MOP	18/21/30	20/24/40	28/34/50	33/40/60
208-230/3/60	FLA/MCA/MOP	13/15/20	15/17/25	18/21/30	22/26/40
460/3/60	FLA/MCA/MOP	6.6/7.7/15	7.2/8.5/15	10/11/15	11/13/20
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

AIR COOLED: Electrical data at OPTIONAL airflow
Split systems with indoor evaporator and remote outdoor condensing section

Model Number		DAPA-2.5	DAPA-03	DAPA-04	DAPA-05
<u>Electrical data based on; electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/45	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.2/6.5/15	5.5/6.9/15	6.5/8.1/20	6.7/8.4/15
<u>Electrical data based on; electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	25/31/35	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/26/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	10/13/15
<u>Electrical data based on; electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on; electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/15
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Evaporator fan motor data</u>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Outdoor condensing unit</u>					
Tons in nominal tons	DRCU-xxxx	2.5	3	4	5
208-230/1/60	FLA/MCA/MOP	18/21/30	20/24/40	28/34/50	33/40/60
208-230/3/60	FLA/MCA/MOP	13/15/20	15/17/25	18/21/30	22/26/40
460/3/60	FLA/MCA/MOP	6.6/7.7/15	7.2/8.5/15	10/11/15	11/13/20
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1
FLA - Full load amps		MCA - Minimum circuit amps (wire sizing amps)		MOP - Maximum over-current protection device amps	

AIR COOLED: Electrical data at OPTIONAL airflow
Split systems with indoor evaporator and remote outdoor condensing section with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPA-2.5</i>	<i>DAPA-03</i>	<i>DAPA-04</i>	<i>DAPA-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/47/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	21/27/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	10/13/15	11/13/15	N/A
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	23/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	11/13/15	N/A
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	15/19/20	17/21/25	17/22/25	N/A
208-230/3/60	FLA/MCA/MOP	12/15/20	13/16/20	14/18/20	N/A
460/3/60	FLA/MCA/MOP	5.5/6.9/15	6.5/8.1/15	6.7/8.4/15	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	26/32/35	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	22/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/47/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	21/27/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	10/13/15	11/13/15	N/A
<u>Electrical data based on: Electric reheat NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	6.8/8.5/15	8.8/11/15	9.3/12/15	N/A
208-230/3/60	FLA/MCA/MOP	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15	N/A
460/3/60	FLA/MCA/MOP	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15	N/A
<u>Evaporator fan motor data</u>					
		<i>NEXT SIZE MOTOR</i>			
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
<u>Outdoor condensing unit</u>					
Tons in nominal tons	DRCU-xxxx	2.5	3	4	5
208-230/1/60	FLA/MCA/MOP	18/21/30	20/24/40	28/34/50	33/40/60
208-230/3/60	FLA/MCA/MOP	13/15/20	15/17/25	18/21/30	22/26/40
460/3/60	FLA/MCA/MOP	6.6/7.7/15	7.2/8.5/15	10/11/15	11/13/20
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0
<u>Condenser fan motor data</u>					
Horsepower		3/4	3/4	3/4	3/4
208-230	FLA	4.2	4.2	4.2	4.2
460	FLA	2.1	2.1	2.1	2.1

FLA - Full Load Amps

MCA - Minimum Circuit Amps (Wire Sizing Amps)

MOP - Maximum Over-current Protection Device Amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

WATER COOLED: Electrical data at STANDARD airflow
Packaged or split indoor systems with single power source

<i>Model Number</i>		<i>DAPW-2.5</i>	<i>DAPW-03</i>	<i>DAPW-04</i>	<i>DAPW-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	27/33/35
<u>Electrical data based on: electric reheat- NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	25/31/40	29/36/45	39/47/60	46/55/80
208-230/3/60	FLA/MCA/MOP	19/24/30	21/26/30	25/31/40	30/37/50
460/3/60	FLA/MCA/MOP	9.3/11/15	10/12/15	13/16/20	15/19/25
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	47/57/70	54/65/80
208-230/3/60	FLA/MCA/MOP	N/A	N/A	33/41/50	38/47/60
460/3/60	FLA/MCA/MOP	N/A	N/A	17/20/25	19/23/30
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	46/56/60	50/61/70	59/72/80	66/81/100
208-230/3/60	FLA/MCA/MOP	28/34/35	30/37/40	34/41/50	55/68/70
460/3/60	FLA/MCA/MOP	13/16/20	14/17/20	17/20/25	27/33/35
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	17/20/30	21/25/40	31/36/60	38/45/70
208-230/3/60	FLA/MCA/MOP	11/13/20	13/16/25	17/20/30	22/26/40
460/3/60	FLA/MCA/MOP	5.6/6.7/15	6.6/7.9/15	9.2/11/15	12/14/20
<u>Evaporator fan motor data</u>		<i>Standard</i>			
Horsepower		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

WATER COOLED: Electrical data at STANDARD airflow
Packaged or split indoor systems with single power source with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPW-2.5</i>	<i>DAPW-03</i>	<i>DAPW-04</i>	<i>DAPW-05</i>
---------------------	--	-----------------	----------------	----------------	----------------

Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/1/60	FLA/MCA/MOP	47/58/60	52/63/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35

Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/1/60	FLA/MCA/MOP	N/A	N/A	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	27/33/35

Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/1/60	FLA/MCA/MOP	26/32/40	31/37/50	41/49/70	46/56/80
208-230/3/60	FLA/MCA/MOP	20/24/30	22/27/30	26/32/35	31/38/50
460/3/60	FLA/MCA/MOP	10/12/15	11/13/15	14/17/20	16/19/25

Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.

208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	54/66/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/42/50	40/48/60
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	19/23/30

Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.

208-230/1/60	FLA/MCA/MOP	47/58/60	52/63/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/11/20	14/18/20	18/21/25	27/33/35

Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR

208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20

Evaporator fan motor data

NEXT SIZE MOTOR

Horsepowers		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1

Compressor data

Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

WATER COOLED: Electrical data at OPTIONAL airflow
Packaged or split indoor systems with single power source

<i>Model Number</i>		<i>DAPW-2.5</i>	<i>DAPW-03</i>	<i>DAPW-04</i>	<i>DAPW-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier YES and STANDARD MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/40	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	27/33/35
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	27/32/40	31/37/50	41/49/70	46/56/80
208-230/3/60	FLA/MCA/MOP	20/24/30	22/27/30	26/32/35	31/38/40
460/3/60	FLA/MCA/MOP	10/12/15	11/13/15	14/17/20	16/19/25
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	54/66/90
208-230/3/60	FLA/MCA/MOP	N/A	N/A	35/42/50	40/48/60
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	19/23/30
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	48/58/60	52/63/70	61/74/90	67/81/100
208-230/3/60	FLA/MCA/MOP	29/35/40	31/37/50	35/43/50	57/69/70
460/3/60	FLA/MCA/MOP	14/17/20	14/18/20	18/21/25	27/33/35
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	19/22/35	23/27/40	33/38/60	38/45/70
208-230/3/60	FLA/MCA/MOP	12/14/20	14/16/25	18/22/35	23/28/40
460/3/60	FLA/MCA/MOP	6.0/7.1/15	6.9/8.2/15	10/12/15	12/14/20
<u>Evaporator fan motor data</u>					
<i>Standard</i>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1
<u>Compressor data</u>					
Tons		2.5	3	4	5
208-230/1/60	FLA	13.5	16.0	23.7	28.8
208-230/3/60	FLA	9.0	10.3	13.5	17.3
460/3/60	FLA	4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

WATER COOLED: Electrical data at OPTIONAL airflow
Packaged or split indoor systems with single power source with NEXT SIZE MOTOR*

<i>Model Number</i>		<i>DAPW-2.5</i>	<i>DAPW-03</i>	<i>DAPW-04</i>	<i>DAPW-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/40	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/44/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/22/25	N/A
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	28/34/45	33/39/50	41/49/70	N/A
208-230/3/60	FLA/MCA/MOP	21/25/30	23/28/35	28/33/40	N/A
460/3/60	FLA/MCA/MOP	10/12/15	12/14/15	14/17/20	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	49/59/70	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	36/43/50	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	18/21/25	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	49/60/70	54/65/70	62/75/90	N/A
208-230/3/60	FLA/MCA/MOP	29/36/40	32/39/40	36/44/50	N/A
460/3/60	FLA/MCA/MOP	14/17/20	15/19/20	18/22/25	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	20/24/35	25/29/40	33/39/60	N/A
208-230/3/60	FLA/MCA/MOP	13/15/20	15/18/25	20/23/35	N/A
460/3/60	FLA/MCA/MOP	6.3/7.4/15	7.9/9.2/15	10/12/15	N/A
<u>Evaporator fan motor data</u>					
<i>NEXT SIZE MOTOR</i>					
Horsepower					
208-230/1/60	FLA	1	1-1/2	2	N/A
208-230/3/60	FLA	6.4	8.8	10.5	N/A
460/3/60	FLA	3.6	4.8	6.2	N/A
		1.8	2.4	3.1	N/A
<u>Compressor data</u>					
Tons					
208-230/1/60	FLA	2.5	3	4	5
208-230/3/60	FLA	13.5	16.0	23.7	28.8
460/3/60	FLA	9.0	10.3	13.5	17.3
		4.5	5.1	7.4	9.0

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

* Next size motor applies to evaporator motor only, condenser motor remains standard.

CHILLED WATER: Electrical data at STANDARD airflow

<i>Model Number</i>		<i>DAPC-2.5</i>	<i>DAPC-03</i>	<i>DAPC-04</i>	<i>DAPC-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	34/43/45	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	18/22/25
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	N/A	N/A	9.3/12/15	18/22/25
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	12/15/20	13/17/20	15/19/20	17/21/25
208-230/3/60	FLA/MCA/MOP	10/13/15	11/14/15	12/15/20	13/16/20
460/3/60	FLA/MCA/MOP	4.8/6.0/15	5.2/6.5/15	5.5/6.9/15	6.5/8.1/15
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	23/29/30	25/31/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	20/25/30	21/26/30
460/3/60	FLA/MCA/MOP	N/A	N/A	9.2/12/15	10/13/15
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	32/40/45	33/42/45	36/45/50	38/47/50
208-230/3/60	FLA/MCA/MOP	19/24/25	20/25/30	20/25/30	38/48/50
460/3/60	FLA/MCA/MOP	8.6/11/15	9.0/11/15	9.3/12/15	18/22/25
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	3.5/4.4/15	5.3/6.6/15	6.8/8.5/15	8.8/11/15
208-230/3/60	FLA/MCA/MOP	2.2/2.8/15	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15
460/3/60	FLA/MCA/MOP	1.1/1.4/15	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15
<u>Fan motor data</u>					
<i>Standard</i>					
Horsepower		1/2	3/4	1	1-1/2
208-230/1/60	FLA	4.0	5.3	6.4	8.8
208-230/3/60	FLA	2.2	3.0	3.6	4.8
460/3/60	FLA	1.1	1.5	1.8	2.4

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

CHILLED WATER: Electrical data at STANDARD airflow with NEXT SIZE MOTOR

<i>Model Number</i>		<i>DAPC-2.5</i>	<i>DAPC-03</i>	<i>DAPC-04</i>	<i>DAPC-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.2/6.5/15	5.5/6.9/15	6.5/8.1/15	6.7/8.4/15
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	25/31/35	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/26/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	10/13/15
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Fan motor data</u>					
<i>NEXT SIZE MOTOR</i>					
Horsepower					
208-230/1/60	FLA	3/4	1	1-1/2	2
208-230/3/60	FLA	5.3	6.4	8.8	10.5
460/3/60	FLA	3.0	3.6	4.8	6.2
		1.5	1.8	2.4	3.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

CHILLED WATER: Electrical data at OPTIONAL airflow

<i>Model Number</i>		<i>DAPC-2.5</i>	<i>DAPC-03</i>	<i>DAPC-04</i>	<i>DAPC-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	13/17/20	15/19/20	17/21/25	17/22/25
208-230/3/60	FLA/MCA/MOP	11/14/15	12/15/20	13/16/20	14/18/20
460/3/60	FLA/MCA/MOP	5.2/6.5/15	5.5/6.9/15	6.5/8.1/15	6.7/8.4/15
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and STANDARD MOTOR</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	25/31/35	26/32/35
208-230/3/60	FLA/MCA/MOP	N/A	N/A	21/26/30	22/28/30
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	10/13/15
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	34/43/45	36/45/50	38/47/50	38/48/50
208-230/3/60	FLA/MCA/MOP	20/25/30	20/25/30	21/27/30	39/49/50
460/3/60	FLA/MCA/MOP	9.0/11/15	9.3/12/15	10/13/15	18/23/25
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and STANDARD MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	5.3/6.6/15	6.8/8.5/15	8.8/11/15	9.3/12/20
208-230/3/60	FLA/MCA/MOP	3.0/3.8/15	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15
460/3/60	FLA/MCA/MOP	1.5/1.9/15	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15
<u>Fan motor data</u>					
<i>Standard</i>					
Horsepower		3/4	1	1-1/2	2
208-230/1/60	FLA	5.3	6.4	8.8	10.5
208-230/3/60	FLA	3.0	3.6	4.8	6.2
460/3/60	FLA	1.5	1.8	2.4	3.1

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

CHILLED WATER: Electrical data at OPTIONAL airflow with NEXT SIZE MOTOR

<i>Model Number</i>		<i>DAPC-2.5</i>	<i>DAPC-03</i>	<i>DAPC-04</i>	<i>DAPC-05</i>
<u>Electrical data based on: electric reheat - YES, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/47/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	21/27/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	10/13/15	11/13/15	N/A
<u>Electrical data based on: electric reheat - YES, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	23/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	11/13/15	N/A
<u>Electrical data based on: electric reheat - NO, 5 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	15/19/20	17/21/25	17/22/25	N/A
208-230/3/60	FLA/MCA/MOP	12/15/20	13/16/20	14/18/20	N/A
460/3/60	FLA/MCA/MOP	5.5/6.9/15	6.5/8.1/15	6.7/8.4/15	N/A
<u>Electrical data based on: electric reheat - NO, 10 lb/hr steam generator humidifier - YES, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	N/A	N/A	26/32/35	N/A
208-230/3/60	FLA/MCA/MOP	N/A	N/A	22/28/30	N/A
460/3/60	FLA/MCA/MOP	N/A	N/A	10/13/15	N/A
<u>Electrical data based on: electric reheat - YES, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	36/45/50	38/47/50	38/48/50	N/A
208-230/3/60	FLA/MCA/MOP	20/25/30	21/27/30	23/28/30	N/A
460/3/60	FLA/MCA/MOP	9.3/12/15	10/13/15	11/13/15	N/A
<u>Electrical data based on: electric reheat - NO, steam generator humidifier - NO, and NEXT SIZE MOTOR.</u>					
208-230/1/60	FLA/MCA/MOP	6.8/8.5/15	8.8/11/15	9.3/12/15	N/A
208-230/3/60	FLA/MCA/MOP	3.6/4.5/15	4.8/6.0/15	6.0/7.5/15	N/A
460/3/60	FLA/MCA/MOP	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15	N/A
<u>Fan motor data</u>					
<i>NEXT SIZE MOTOR</i>					
Horsepower					
		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A

FLA - Full load amps

MCA - Minimum circuit amps (wire sizing amps)

MOP - Maximum over-current protection device amps

Supplemental Electrical Data

A. Split systems with indoor evaporator section and indoor condensing unit - dual power source

Electrical data for indoor condensing units with NEXT SIZE condenser fan motor.

<i>Model Number</i>		<i>DAAC-2.5</i>	<i>DAAC-03</i>	<i>DAAC-04</i>	<i>DAAC-05</i>
Next size condenser motor					
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
Condensing Unit					
208-230/1/60	FLA/MCA/MOP	20/24/35	25/29/40	33/39/60	N/A
208-230/3/60	FLA/MCA/MOP	13/15/20	15/18/25	20/23/35	N/A
460/3/60	FLA/MCA/MOP	6.3/7.4/15	7.9/9.2/15	10/12/15	N/A

B. Split systems with indoor evaporator/condensing section and indoor condenser - dual power source

Electrical data for indoor condenser with NEXT SIZE condenser fan motor.

<i>Model</i>		<i>DAIC-2.5</i>	<i>DAIC-03</i>	<i>DAIC-04</i>	<i>DAIC-05</i>
Next size condenser motor					
Horsepower		1	1-1/2	2	N/A
208-230/1/60	FLA	6.4	8.8	10.5	N/A
208-230/3/60	FLA	3.6	4.8	6.2	N/A
460/3/60	FLA	1.8	2.4	3.1	N/A
Condenser					
208-230/1/60	FLA/MCA/MOP	6.8/8.5/15	8.8/11/15	9.3/12/15	N/A
208-230/3/60	FLA/MCA/MOP	3.6/4.5/15	4.8/7.1/15	6.0/7.5/15	N/A
460/3/60	FLA/MCA/MOP	1.8/2.3/15	2.8/3.5/15	3.0/3.8/15	N/A



DATA AIRE INC.

230 W. BlueRidge Avenue
Orange, CA 92865

800-347-2473

www.dataaire.com e-mail: sales@dataaire.com

A Member of the CS Group of Companies
© 2013 Data Aire, Inc.

Data Aire, Inc. reserves the right to make design changes for the purpose
of product improvement, or to withdraw any design without notice.

DAMP-R-410a 0810 Rev. H

