





Series F-CE

Typ F-CE		300/75	300/85	300/95	500/75	500/85	
Load	kg	300	300	250	500	500	350
Construction height	mm	70	70	70	70	70	70
Stroke	mm	750	850	950	750	850	950
Useful stroke	mm	680	780	880	680	780	880
Length of platform	mm	1450	1600	1800	1450	1600	1800
Width of platform	mm	900	900	900	900	900	900
Own weight	kg	220	240	250	220	240	250
Lifting-, lowering time approx.	sec	20	25	30	20	25	30
Motor	Voltage	230/400	230/400	230/400	230/400	230/400	230/400
Power	kW	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55
Wedge (accessory)							

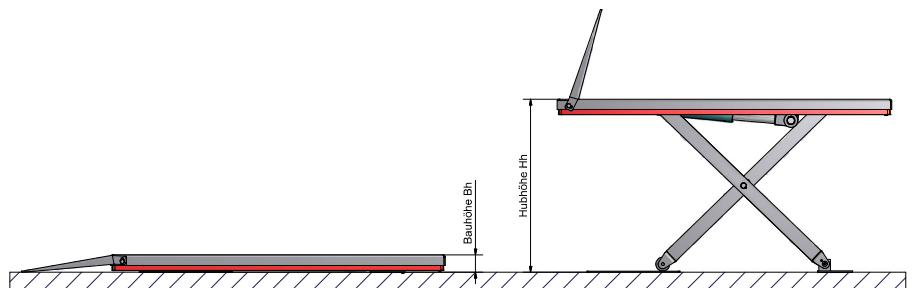

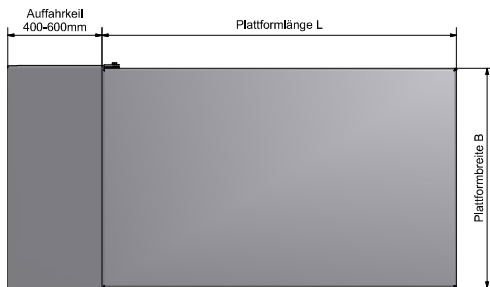

Series F-CE

Typ F-CE		1000/75	1000/85	1000/95
Load	kg	1000	1000	850
Construction height	mm	80	80	80
Stroke	mm	750	850	950
Useful stroke	mm	670	770	870
Length of platform	mm	1450	1600	1800
Width of platform	mm	900	900	900
Own weight	kg	270	290	310
Lifting-, lowering time approx.	sec	25	30	35
Motor	Voltage	230/400	230/400	230/400
Power	kW	0,75/0,55	0,75/0,55	0,75/0,55
Wedge (accessory)				

